



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

June 24, 2015

Hamdi Latif
Flexabar Corp
1969 Rutgers University Blvd
Lakewood, NJ 08701

Subject: Label Amendment – Revise signal word
Product Name: ULTRA GARD
EPA Registration Number: 9339-34
Application Date: April 15, 2015
Decision Number: 503573

Dear Mr. Latif:

The amended label referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. This approval does not affect any conditions that were previously imposed on this registration. You continue to be subject to existing conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one copy of the final printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR 152.3.

Should you wish to add/retain a reference to the company's website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA's Office of Enforcement and Compliance.

Your release for shipment of the product constitutes acceptance of these conditions. If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6. If you have any questions, please contact Elizabeth Watkins by phone at 703-347-0241, or via email at Watkins.Elizabeth@epa.gov.

Page 2 of 2
EPA Reg. No. 9339-34
Decision No. 503573

Sincerely,

Elizabeth H. Watkins for

John Hebert, Chief
Regulatory Management Branch I
Registration Division (7510P)
Office of Pesticide Programs

Enclosure

*Right Panel***PRECAUTIONARY STATEMENTS****HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

CAUTION: Avoid contact with skin or clothing. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco. Wear long-sleeved shirt and long pants, socks, shoes, and gloves. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals.

FIRST AID:**If on skin:**

- Take off contaminated clothing
- Rinse skin immediately with plenty of water for 15-20 minutes
- Call a poison control center or doctor for treatment advice

Have the product container or label with you when calling a poison control center or doctor or going for treatment. You may also contact 1-800-424-9300 for emergency medical treatment information.

Note to Physician: Contains petroleum distillates. Vomiting may cause aspiration pneumonia.


PRODUCT EMERGENCIES: 1-800-424-9300

ENVIRONMENTAL HAZARDS: This pesticide is toxic to aquatic organisms including fish and shellfish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your state water board or regional office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE. Do not use or store near heat or open flame.

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Flexdel Corp. including environmental conditions. Therefore, Flexdel Corp. cannot guarantee this product's suitability for your particular purpose of application. Implied warranties of fitness for particular purpose and of merchantability are excluded. Flexdel Corp. shall not under any circumstances, be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Flexdel Corp., option.

© 2012 **FLEXDEL** Corporation
 Manufactured for Flexdel Corporation
 1969 Rutgers University Blvd., Lakewood, NJ 08701 USA
 888.353.9335 aquagardboatpaint.com
 Made in U.S.A. Printed in U.S.A.

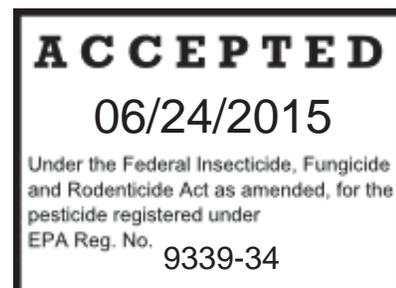

Center Panel

FLEXDEL Ultra Gard PREMIUM ANTI-FOULING

(optional text in brackets)

[Blue]
[Red]
[Black]

- **For Fiberglass & Wooden Boats**
- **High Load Ablative Action Repels
Barnacles & Other Growth**
- **Outstanding
Performance**

ACTIVE INGREDIENTS: Cuprous Oxide.....37.5%
INERT INGREDIENTS62.5%
Total..... 100.00%
Copper as Metallic..... 33.3%

Contains Petroleum Distillates

1 US GALLON / 3.785 LITER

EPA Reg. No. 9339-34

EPA Est. No. 9339-NJ01

Keep out of reach of children.

WARNING

See side panel for First Aid and Precautionary statements.

*Left Panel***DIRECTIONS FOR USE**

Ultra Gard is a cuprous oxide pigmented coating, formulated especially to prevent the attachment of both plant and animal fouling on vessels immersed in both seawater and “brackish” water.

1A) Surface preparation: New / Bare Fiberglass Hulls:

Wipe down surface with **Aquagard 180 Wash & Dewaxer**. Change rags frequently to assure complete removal of wax and mold release agent & contaminates. Sand surface thoroughly with 80 or 100 grit sand paper. Wipe down surface again with **Aquagard 180 Wash & Dewaxer** to remove sanding residue and immediately apply one (1) coat of Aquagard Primer with a roller or brush. Allow Primer to dry for a minimum of two (2) hours.

1B) Surface preparation: For previously painted surface:

To prepare the surface for coating, remove all loose coating and fouling residue by either washing with high pressure water, scraping or by sanding. Apply a small patch of Flexdel Ultra Gard Anti-Fouling Paint to test compatibility with the old paint. If Flexdel Ultra Gard Anti-Fouling Paint cracks or lifts, all the old paint will have to be removed. Then follow the “Bare Fiberglass Hulls” system specified above. If nothing appears to happen when this product is applied, let the test patch dry for several hours and then scrape this product to see if it is adhering to the old paint satisfactorily. If the adhesion looks good, sand the entire surface thoroughly with 80 grit sandpaper.

Previously painted surfaces in poor condition (such as chipping, peeling or flaking) should be stripped to bare fiberglass. Then proceed with the “Bare Fiberglass Hulls” preparation.

2) Application: A clean dry surface (free of scale, corrosion, dirt, grease, oil, marine fouling, or other foreign matter) will provide the optimum performance of this coating, when used for either complete coating or touch-up. Wipe down surface with **Aquagard 180 Wash & Dewaxer**. Inadequate surface preparation will result in unsatisfactory performance. Mix the coating thoroughly for a minimum of five (5) minutes to insure complete pigment reincorporation. Apply by either brush or roller. Flexdel Ultra Gard Anti-Fouling Paint should be applied at or above 50°F. Apply two (2) coats of Flexdel Ultra Gard Anti-Fouling Paint. Allow four (4) hours drying time between coats. Let final coat dry eight - twelve (8-12) hours before launching the boat. The theoretical coverage of this product is approximately 400 square feet per gallon. Clean up with paint thinner or white spirits when finished.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

Pesticide Disposal. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your state pesticide or environmental control agency, or the hazardous waste representative at the nearest EPA regional office for guidance.

Container Disposal. Nonrefillable container. Do not reuse or refill this container. Offer for recycling if available. If partly filled: Call your local solid waste agency for disposal instructions. Never place unused product down any indoor or outdoor drain. **Commercial Users:** Triple rinse container promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times. Then offer the container for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.